HOT POSEIDON

Estrattore ad acqua calda 3 motori, dotato di un caldaia in ACCIAIO INOX da 2 litri, che può garantire una temperatura d'acqua fino a 90 gradi in esercizio continuo. La pompa rotativa da 90W che fornisce un pressione di 8 bar, il serbatoio acqua da 30 litri e gli utensili industriali in ACCIAIO INOX, rendono HOT POSEIDON il partner ideale per impieghi professionali intensivi.

It is a 3 motors carpet cleaner, equipped with a STAINLESS STEEL BOILER with 2 lit of capacity, placed in a dedicated case at the bottom of the machine, that can grant a water temperature up to 90 degrees in continous operation. A 90W rotary Pump supplies a 8 bar injection power. The 30 liters water tank capacity and the industrial upholstery tools IN STAINLESS STEEL, make this machine the ideal partner for intensive professional uses.

3 Motori
Motors

W Acqua
W *Wet*


Acqua calda
Hot water

R Pompa estrattore rotativa
R *Peripheral electrical pump*

Lavamoquette
Clean carpet & floor **vacuum**



		BLHPO375
Motors number	Numero motori	3
Stage	Stadi motori	double
Volt (V)	Volt (V)	220 - 240
Frequency (Hz)	Frequenza (Hz)	50 / 60
Cooling	Tipo raffreddamento	by pass
P max motors (W)	P max motori(W)	3600
Waterlift (mm H_2O)	Depressione (mmH_2O)	2400
Air flow (m^3/h)	Aria aspirata (m^3/h)	645
P boiler (W)	P caldaia (W)	1800
Pump (W)	Pompa (W)	90
Capacity pump (it/min)	Portata pompa (it/min)	2
Lift pump (bar)	Pressione pompa (bar)	8
Lpa sonorus 3mt (dB(A))	Lpa sonoro 3mt (dB(A))	67
Total tank capacity (lt)	Capacità tot. fusto (lt)	60
Detergent tank (lt)	Serbatoio detergente (lt)	30
Weight (kg)	Peso (kg)	41,0

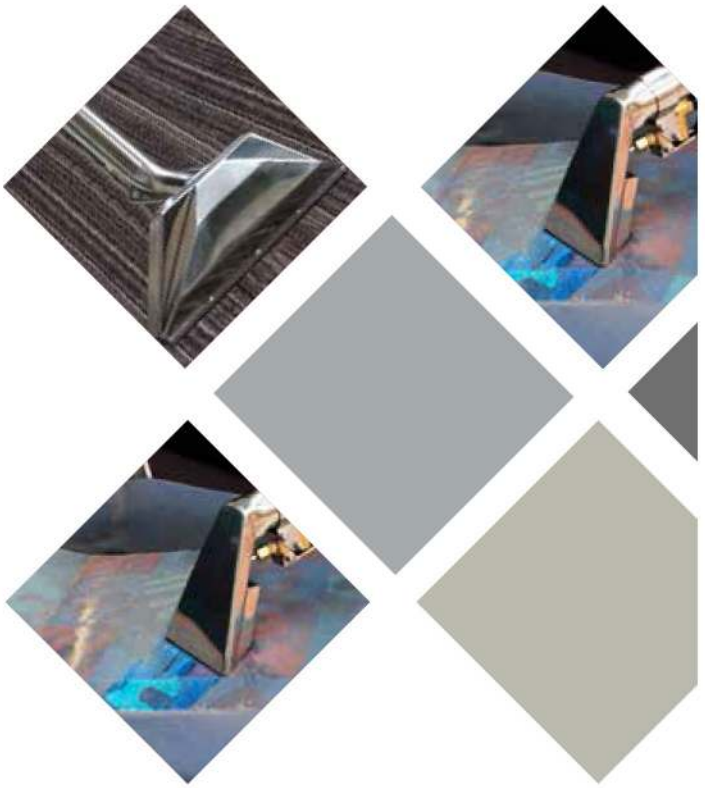

Standard Accessories and Filters

	DESCRIPTION	CODE
1	Flexible hose+ complete Hydrolitic tube mt.5,0 Ø40	**ACTF038EHP**
2	Complete armchair nozzle stainless steel 4" - 100mm	**ACBL004PO/C**
3	Sponge filter for liquids	**ACCA165A**
4	Anti-Foam Device	**CGDA060**
5	Drainage kit	**ACKI028**

Options

	DESCRIPTION	CODE
6	Complete moquette nozzle INOX 12" - 300mm	**ACBL012PO/C**


1


2


3


4


5


6