

Body Repair Kit

BODY REPAIR KIT

► The most complete body repair kit due to the number and variety of accessories.

► **Important advantage:** safer and more sturdy thanks to the threaded connections which allow pulling operations, compared with other more extensive but less reliable connection systems in the market which only allow pushing operations.

► Indispensable for jobs such as body repairs, rescue and roadside service or any other pushing, putting, spreading or lifting applications that require hydraulic force.

IMPORTANT: As the cylinders have a greater capacity than the components, namely chains, cylinder toes, tube extensions, etc., they should never exceed half their rated capacity.

The maximum capacity of the SH-1 spreading cylinder is 1t.

Maximum working load of the chain: 1t.



Pulling cylinder.
Optional.



Safety overload valve.



Hydraulic stroke limitation.



Piston retracts by spring.



BR10

CAPACITY (t)	10	20
1	BM-04	BM-04
2	CC-10-B	CC-20-B
3	GC-10/2272	A-5167
4	A-5541	A-5541
5	A-5033 / Ø 42 L 700	A-5233 / Ø 60 L 700
6	A-5034 / Ø 42 L 480	A-5234 / Ø 60 L 460
7	A-5035 / Ø 42 L 230	A-5235 / Ø 60 L 255
8	A-5048	
9	A-5042	A-5042
10	A-5038	A-5038
11	A-5053	
12	A-5054	
13	A-5055	A-5284 *
REFERENCES	BR10	BR20

* These components have a different design to that shown in the picture.


REFERENCES:

	Model	Cap. (t)	Rec. (mm)
CT-5	BR10	5	138
CT-10	BR20	10	138


BR20


CAPACITY (t)	10	20
14	A-5050	A-5280 *
15	A-5039	A-5239
16	A-5036 / Ø 42 L 130	
17	A-5049	
18	SH-1	
19	A-5043	
20	A-5086	
21	A-5057	
22	A-5058	
23	A-5056	
24	A-5051	A-5252 *
25	A-5052	
Weight (Kg)	45	45
REFERENCES	BR10	BR20

* These components have a different design to that shown in the picture.

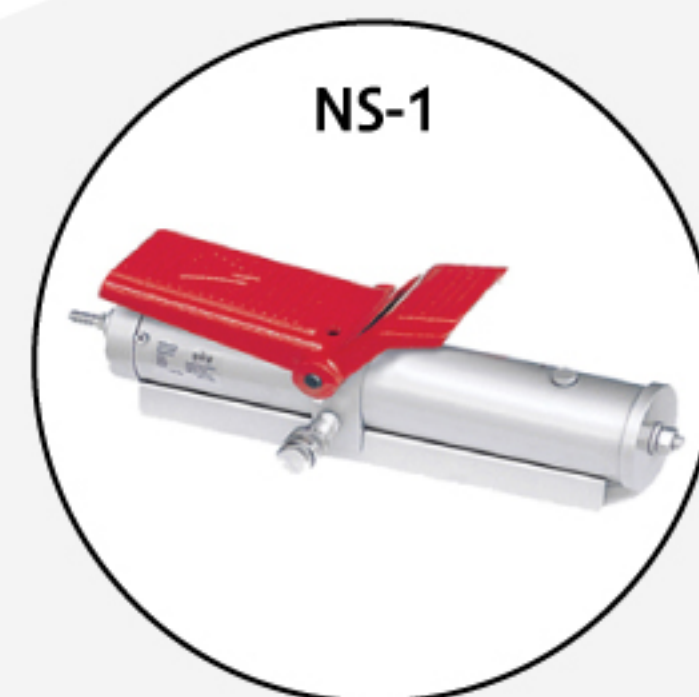

Air-powered pump.
Optional.