Floor Cranes

FLOOR CRANES

▶ All models are fitted with polyamide wheels and casters to facilitate maneuverability. These wheels will not damage garage floors, do not rust and are quiet in operation.


▶ The new positioning of the swivel wheels allows for excellent maneuverability.

- Safety overload valve.
- Hydraulic stroke limitation.
- LCS lowering system.
- Operation by the "dead man's" principle.

MADE IN SPAIN


C-2000V

Window to show safe working load at the selected position. Push button for quick change of position of the extendable jib.

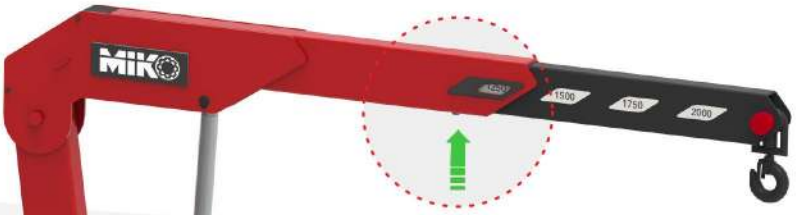

C-1000V




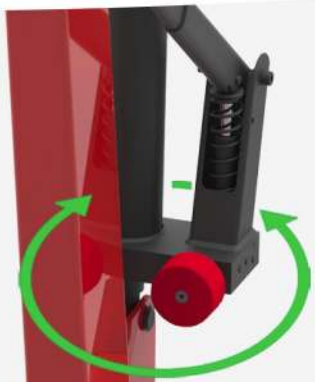

Swivel hydraulic unit.

The pump piston spring improves operation. Release handle with " dead man's " operation provides maximum lowering precision.

Location of swivel wheels provides greater stability when loaded.

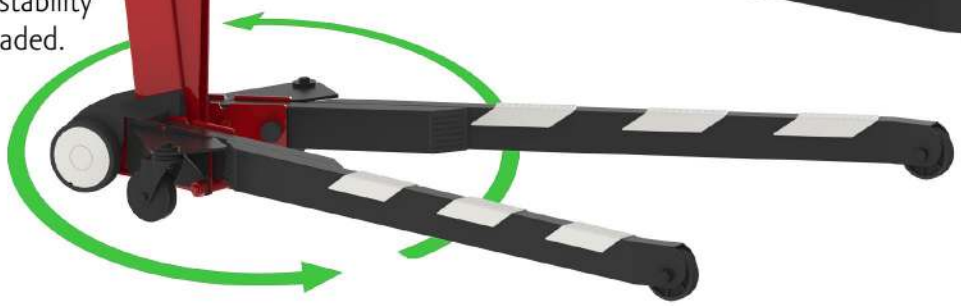

Rubber protections to prevent from any possible damage to the vehicle or to the crane legs.
They improve visibility to prevent accidental bumping.

Crane swings on swivel wheels.
Front wheels do not touch the ground when crane is not loaded. Maximum maneuverability.

Errors excepted. Information and technical data are subject to change.


MIKOGROUP INTERNATIONAL S.L. - Rambla del Prat 2, Ppal 1ª - 08012 Barcelona - Spain
Tel : +34 934 16 15 39. - Fax : +34 934 08 68 95. - E-mail : info@mikogroup.eu - Web : www.mikogroup.eu




Double tube legs on **C-1000V** and **C-2000V** models provide more stability, strength and accessibility.



These models are easy to fold and require only a small parking space. Auxiliary wheels for easy handling when folded.

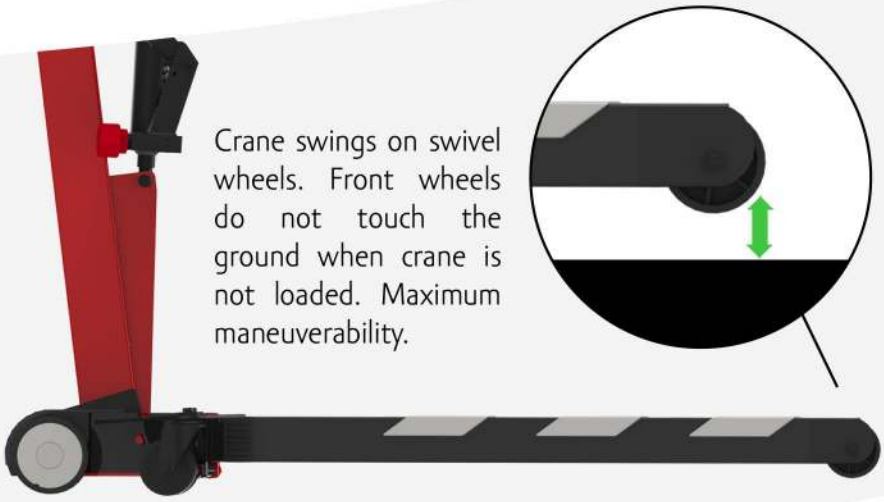

Crane swings on swivel wheels. Front wheels do not touch the ground when crane is not loaded. Maximum maneuverability.

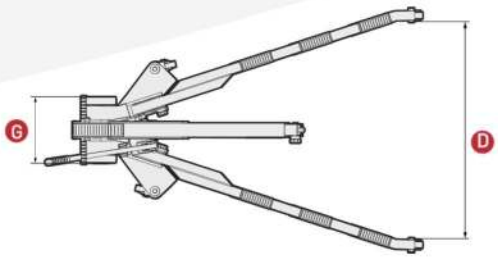

CAPACITY (Kg)	650	1000	2000
A	1580	1580	1740
B	2200	2200	2460
C	1480	1580	1920
D	820	970	1080
E	112	112	150
R Minimum	960	960	1200
R Maximum	1300	1300	1610
G	530	530	700
Weight (Kg)	75	83	140
REFERENCES	C-650V	C-1000V	C-2000V

Measures in mm.

