

Floor Cranes

FLOOR CRANES

- All models are fitted with polyamide wheels and casters to facilitate maneuverability. These wheels will not damage garage floors, do not rust and are quiet in operation.
- The new positioning of the swivel wheels allows for excellent maneuverability.

-  Safety overload valve.
-  Hydraulic stroke limitation.
-  LCS lowering system.
-  Operation by the "dead man's" principle.





C-2000V

Window to show safe working load at the selected position. Push button for quick change of position of the extendable jib.


C-1000V

Errors excepted. Information and technical data are subject to change.

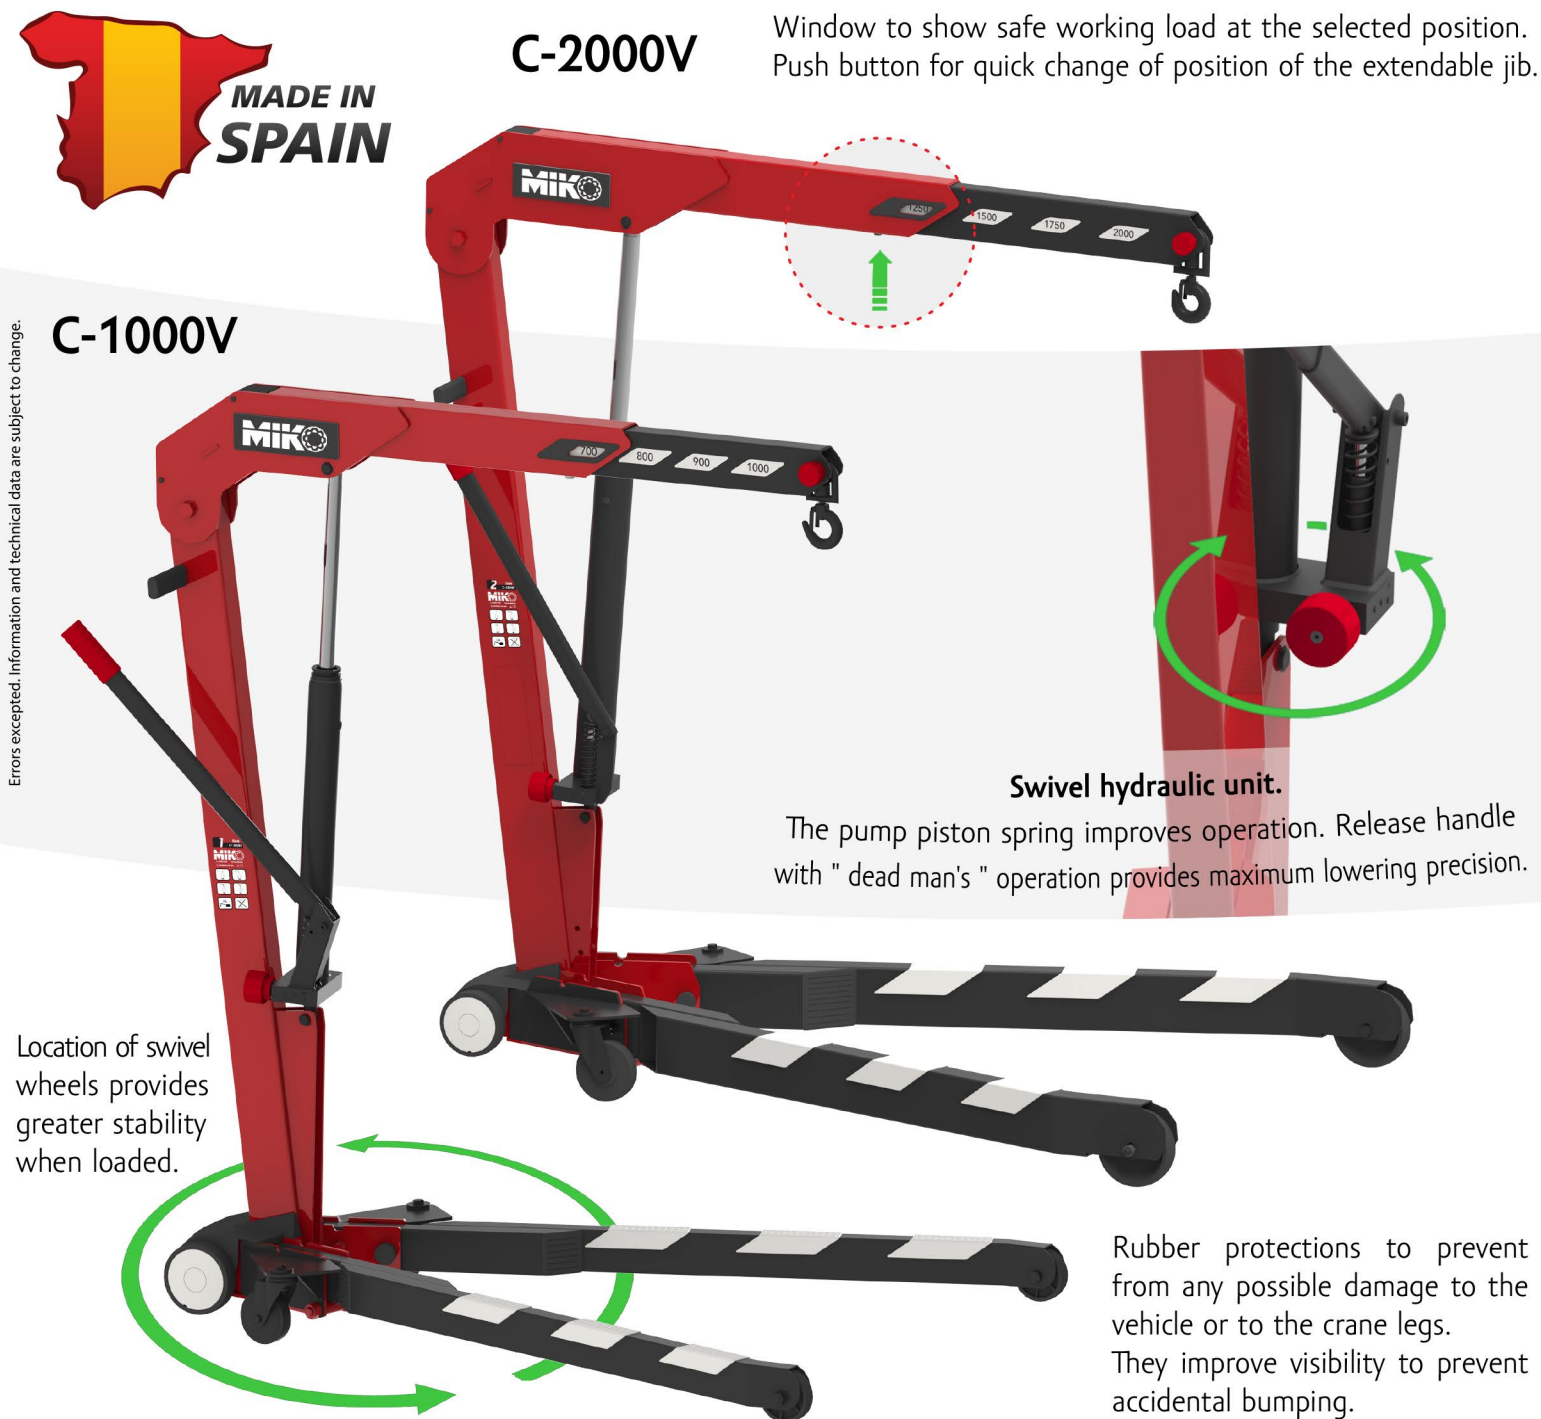

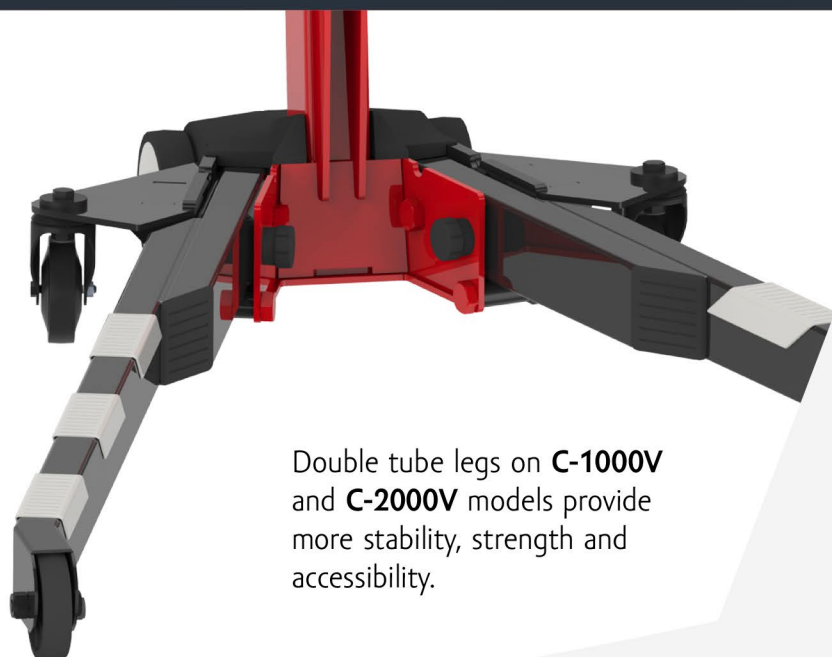


Double tube legs on **C-1000V** and **C-2000V** models provide more stability, strength and accessibility.

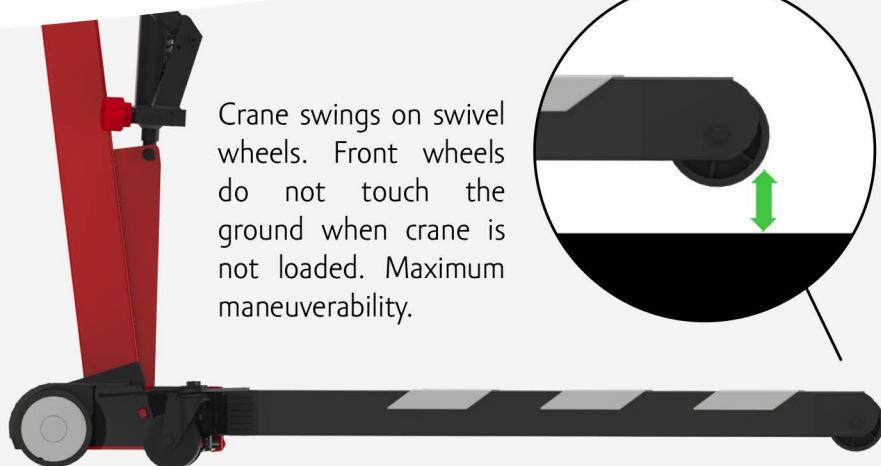

Crane swings on swivel wheels. Front wheels do not touch the ground when crane is not loaded. Maximum maneuverability.



These models are easy to fold and require only a small parking space. Auxiliary wheels for easy handling when folded.

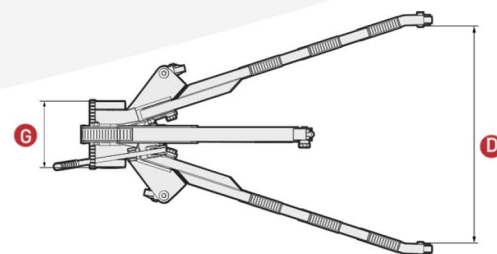

CAPACITY (Kg)	650	1000	2000
A	1580	1580	1740
B	2200	2200	2460
C	1480	1580	1920
D	820	970	1080
E	112	112	150
R Minimum	960	960	1200
R Maximum	1300	1300	1610
G	530	530	700
Weight (Kg)	75	83	140

REFERENCES

C-650V

C-1000V

C-2000V

Measures in mm.

