CLEAR FLOOR DIRECT-DRIVED TWO-POST LIFT

MODEL 218C

PEAK®
World-class lifts

Great Lifting Giant

Built to conquer the toughest lifting challenges, the PEAK 218C delivers unmatched strength and stability. Its meticulously reinforced construction and extra-long carriages provide rock-solid support. Incorporating 3-in-1 technology, it offers three extreme height settings and comes standard with both rubber pads and saddle adapters to handle a variety of vehicles up to 8000kg.




5-2-1 WARRANTY
WORLD-CLASS PRODUCTS

FEATURES

- Heavy duty design, 8000kg (18,000 lbs) capacity;
- Clear-floor design, provides an unobstructed floor use;
- Exclusive feature: single-point manual lock release mechanism, disengages both columns simultaneously from one side;
- 4 two-stage rugged arms are allow to load more heavy-duty vehicles;
- Overhead safety shut-off device prevents vehicle damage;
- Extremely long carriages are equipped to enhance the stability and durability;
- The width between columns is extremely wide over 3100mm ;
- Extremely high design, comes standard with 3 adjustable heights settings;
- 3in1 aero cables are used for synchronization ;
- Self-lubricating UHMW polyethylene sliders;
- Dual direct-drive hydraulic cylinders, are designed and made on high standard utilizing high quality seals;
- Single-screw rubber pad with pin dia 50mm, comes with 3" and 6" extension adapter;
- Saddle adapters also come as standard.
- Automatic arms restraints;
- Toe guards and tool trays come as standard.



Single point safety release makes it easier for operators to unlock both columns from one column.




4 two-stages arms are allow to load more heavy-duty vehicles. Tool trays and toe guards come as standard.



Optional heavy duty extreme wide saddle adapter. Kits No. 21109





Both 3" and 6" extension adapters come as standard.



Extremely long carriages are equipped to enhance the stability and durability.

SPECIFICATIONS

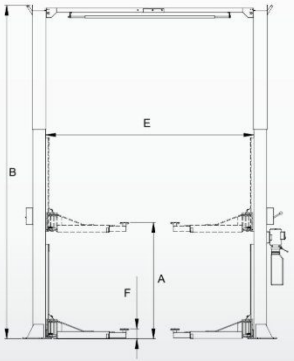



Model	Style	Lifting Capacity	Lifting Time	A (with single-scew rubber pad)				B	C	D	E	F	Gross Weight	Motor
				Max. Lifting height: (w/o extension adapter)	Max. Lifting height: (w/ extension adapter)	Max. lock height: (w/o extension adapter)	Max. lock height: (w/ extension adapter)	Overall Height:	Overall Width	Drive-Thru Clearance	Width Between Columns	Minimum Pad Height		
218C	Clear Floor two post lift	8.0 T (18,000lbs)	84S	1902mm (74 7/8")~ 1936mm (76 1/4")	2131mm (83 7/8")~ 2165mm (85 1/4")	1852mm (72 7/8")~ 1886mm (74 1/4")	2081mm (81 7/8")~ 2115mm (83 1/4")	4420mm (174") 4725mm (186") 5030mm (198")	3859mm (151 15/16")	2805mm (110 7/16")	3137mm (123 1/2")	175mm (6 7/8")	1318kg (2,906lbs)	3.0HP

PEAK CORPORATION
http://www.peaklift.cn

No.3 Luomu Road, Muyuan, Shishan Town, Nanhai District, Foshan (528225) , China
Tel:86-757-81102815 Fax:86-757-81102809

202604