

AUTOMATIC TYRE CHANGERS
WITH TILT TOWER

TS 45.26D
Series

Rotary® ROTARY SOLUTIONS

SERVING THE SHOP® SINCE 1925


AUTOMATIC TYRE CHANGERS WITH TILT TOWER

Storage area on selected models.



TS45.26DP PREMIUM

Professional **PNEUMATIC AUXILIARY ARM** for selected models.

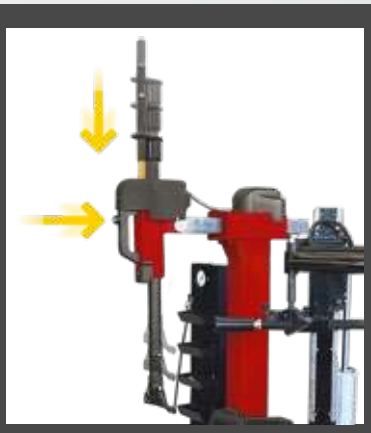

Tool head featuring **PNEUMATIC POSITIONING** with up and down movement. (DP models only)



Plate with diameter up to 26" with **ADJUSTABLE JAWS**.



Pneumatic bead breaker with **ADJUSTABLE SHOVEL** (DPW Plus model only).

All pedals are easy to reach without the need for unnatural movements.

26"

HIGH VOLUME

ROTARY SOLUTIONS



Ø 40 mm
tool rod



60 x 60 mm
horizontal arm



Motor with **INVERTER**.
Allows the operator to change the wheel rotation speed (0 - 15 rpm). When stress on the bead increases, rotation automatically slows down to prevent damage to the tyre.

The **FRAME AND TILT TOWER** are extremely strong so all types of car and van wheels can be changed while ensuring **UTMOST SAFETY** for the tyre and rim.



The optimised design provides easy access to internal components and simple adjustments.



CONFIGURATIONS	TS 45.26D	TS 45.26DP	TS 45.26D Pro	TS 45.26D Pro W	TS 45.26DP Premium
Plastic tool				✓	✓
Pneumatic tool positioning		✓			✓
Adjustable bead breaker shovel					✓
Pneumatic bead press arm			✓	✓	✓
Tool & accessories storage				✓	✓
WDK certificate				✓	✓

TECHNICAL DATA

	TS45.26D	TS45.26DP	TS45.26D Pro	TS45.26D Pro W	TS45.26DP Premium
	ROT.TS45X.202147	ROT.TS45X.202116	ROT.TS45X.202062	ROT.TS45X.202093	ROT.TS45X.202031
Max. torque (Nm)	1200 (885 ft.lbs)	1200 (885 ft.lbs)	1200 (885 ft.lbs)	1200 (885 ft.lbs)	1200 (885 ft.lbs)
Outer clamping range	10" - 26"	10" - 26"	10" - 26"	10" - 26"	10" - 26"
Inner clamping range	13" - 28.5"	13" - 28.5"	13" - 28.5"	13" - 28.5"	13" - 28.5"
Max. wheel diameter	45"	45"	45"	45"	45"
Max. rim width	13.5"	13.5"	16"	16"	16"
Max. wheel width	16"	16"	16"	16"	16"
Bead breaker force	11900 N (2675 lbf)				
Air supply	8 - 10 bar (116 - 145 psi)				
Power inverter motor	0.75 kW (1 Hp)				
Power supply	200 - 240 V / 50 - 60 Hz				
Phases	1 Ph				
Typical current draw (A)	10				
Rotation speed	0 - 16 rpm				

ACCESSORIES



G800A11
Plastic guard for side bead breaker shovel (1 pc.).



G800A117
Plastic quick insertion guard for tool head (1 set, 2 pcs.).



VSG.8A137.902160
Tubeless inflation kit for plate tyre changers.



VSG.8A138.902184
Front wheel lift.



VSG.8A139.902207
Bead breaker roller kit with bead pusher arm | PL100 equipment necessary.



VSG.8A140.902221
Plastic guard for jaws (10 pcs.).




VSG.8A140.902245
Plastic guard for jaws (10 pcs.).




VSG.8A141.902269
Side column storage with built-in gauge.



VSG.PL100.900401
Bead pusher device for tyre changers with tilting pole (installation on right side).





ROTARY SOLUTIONS
a DOVER company

GERMANY BlitzRotary GmbH Hüfinger Straße 55 | 78199 Bräunlingen | +49 771 9233 0
ITALY Vehicle Service Group Italy S.r.l. Via F. Brunelleschi 9 | 44020 Ostellato FE | +39 051 6781511
FRANCE RAV France SARL 4, Rue De Longue Raie, ZAC de la Tremblaie | 91220 Le Plessis Pâté | +33 1 60 86 88 16
UK Vehicle Service Group UK Ltd 3 Fourth Avenue, Bluebridge Industrial EST | Halstead, Essex, CO9 2SY | +44 1787 477711

info.emea@rotarysolutions.com
ROTARYsolutions.eu