




Product Image



Outside Size(mm)

9146*6396*4450

Intside Size(mm)

9000*4500*3500

Front Door(mm)

3500(W)*3200(H)

Service Door(mm)

800*2000

Total Power

31.5kw

Cabin System

Wallboard

EPS colorful steel skin board, wall panel: 70mm thick, tongue & groove style compound construction, aluminum-alloy frame, anti-flame and heat- insulation

Basement

Galvanized steel sheet and square steel pipe assembling, 2 lines of grids, 3 lines of diamond plates, 350mm height basement, three ramps.

Inlet fan

Capacity: 20000m³/h/fan

Power: 7.5kw

Quantity: 2 sets

Exhaust fan

Capacity: 36000m³/h

Power: 15kw

Quantity: 1 set

Purification System

Dual filtering structure, the primary filter can capture granules larger than 10 μm. ceiling filter can capture granules bigger than 4 μm. the whole purification system has capacity of large volume of dust. Its filtering rate reaches 98%. air pressure balance gauge, TSP≤1.2mg/m³

Heating System

Italy Riello RG5S diesel burner, 260000Kcal/h, 20N damper

SUS304 stainless steel heating exchanger, argon arc welding

Max temp: 80°C, heating time: 6-10min(20-60°C), fuel consumption: 6-10kg/vehicle

Lighting System







Ceiling Light: 48pcs 16w LED lamp; bottom light: 20pcs 16w LED lamp, 1000 Lux

Controlling System

Spray & baking switch, light switch, emergency stop, breakdown alarm, failure alarm, timer

Environmental System

Multi-layers fiberglass filter, active carbon

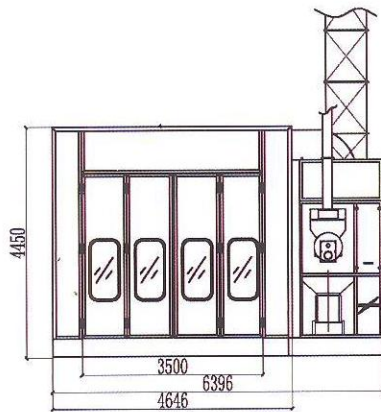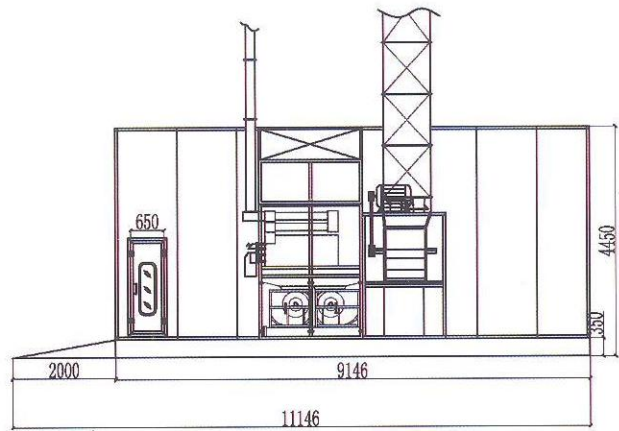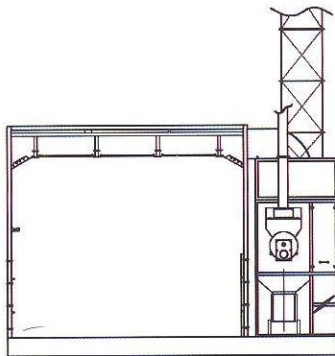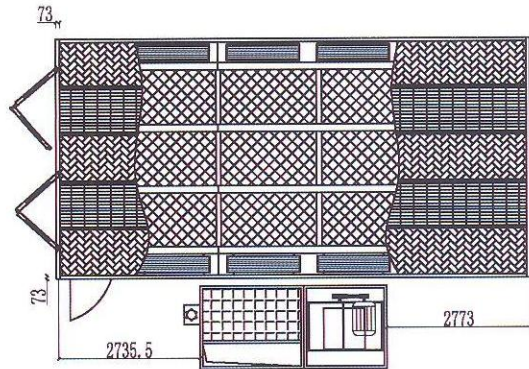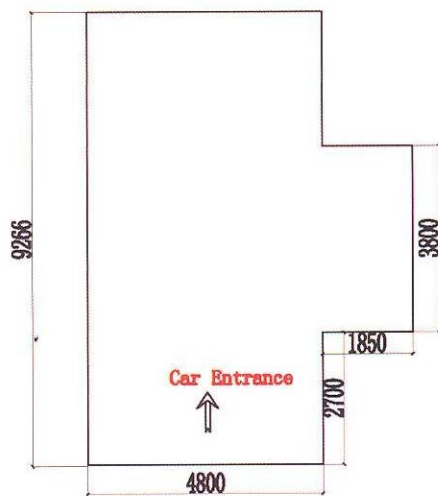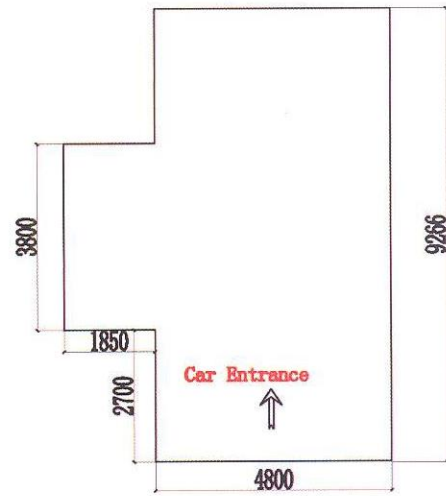

Cements thickness: 80mm Cements thickness: 80mm